

LIUGONG

4280DE



BATTERY TYPE	LFP
RATED STORAGE ENERGY	423 kWh
OPERATING WEIGHT	24,000 kg
STANDARD MOLDBOARD SIZE	4270x645x19mm
MAX. BLADE PULL	123 kN
MINIMUM TURNING RADIUS	7,500 mm



B A T T E R Y E L E C T R I C V E H I C L E

TOUGH WORLD. TOUGH EQUIPMENT.

4280DE SPECIFICATIONS >>>

POWER BATTERY

Battery Type	LFP
Rated Storage Energy	423 kWh
Nominal Voltage	618 V
System Voltage	DC24V
BMS Protection Level	IP67
Recommended Charger	120 ~ 300 kW
Charging Time (300 kW Charging Power)	≤ 80 min

DRIVE MOTOR

Peak Power	160 kW
Protection Level	IP67
Ambient Temperature	- 30 ~ 85°C
Cooling Type	Intelligent temperature control, liquid cooling
Altitude	≤ 5,000 m

HYDRAULIC MOTOR

Peak Power	70 kW
Protection Level	IP67
Ambient Temperature	- 30 ~ 85°C
Cooling Type	Intelligent temperature control, liquid cooling
Altitude	≤ 5,000 m

TRANSMISSION


Manufacturer	LiuGong
Number of Speeds, fwd / rev	2 / 2
Maximum Travel Speed, fwd	40 km/h
Maximum Travel Speed, rev	28 km/h
Transmission Type	Planetary electronic control shift

AXLES

Type	NAF wet axle
Axle Oscillation	± 15°
Tire Size	20.5R25 ★L-3

WORKING HYDRAULICS

System	Variable single pump
Operation	Dual electronic-control joystick
Work Pump	Variable pump
Work Pressure	21 MPa

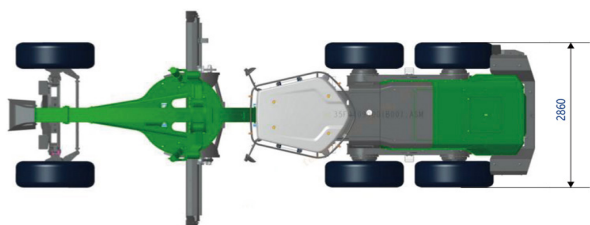

STEERING HYDRAULICS

System	Load sensing
Steering Relief Pressure	16.7 MPa

BRAKES

Service Brake Type	Dual circuit full hydraulic braking
Service Brake Actuation	Hydraulic wet brake
Service Brake Pressure	6.2 MPa
Parking Brake Type	Disk (electronic control)
Parking Brake Actuation	Electric-hydraulic control

LOADER ARM PERFORMANCE


Operating Weight	24,000 kg
Standard Moldboard Size	4270x645x19 mm
Max. Blade Pull (f = 0.75)	123 kN
Minimum Turning Radius	7,500 mm
Maximum Travel Speed, fwd	40 km/h
Maximum Travel Speed, rev	28 km/h
Steering Angle	±50°
Front Axle, Wheel Lean Angle	±18°
Front Axle Oscillation	±16°
Ground Clearance-Front Axle	545 mm
Maximum Lift Above Ground	500 mm
Maximum Depth of Cut	838 mm
Maximum Sloping Angle	90°
Circle Rotation	360°
Moldboard Side Shift, left /right	575/825 mm
Bank Cut Angle	28°-71°
Frame Articulation Angle	±27°

DIMENSIONS

Ground Clearance	422 mm
Wheelbase	6,700 mm
Cab Height	3,530 mm
Middle and Rear Wheel Wheelbase	1,632 mm
Overall Width Over Tires	2,860 mm
Length (Standard configuration)	9,980 mm

SERVICE CAPACITIES

Anti-freeze	45 L
Hydraulic Reservoir	110 L
Axle, Rear	210 L
Transmission	28 L

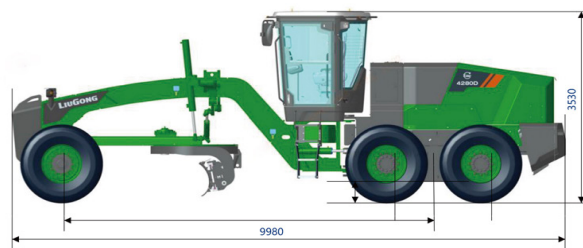

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.

01/2025 Designed by LiuGong
Replace the previous versions of 01/2025