


CPD30/35-EJL SPECIFICATION

General	Model	1			CPD30-EJL		CPD35-EJL	
	Power Type	2			Electric	Electric	Electric	Electric
	Base Capacity	3	@rated load center	kg	3000	3000	3500	3500
	Load Center	4		mm	500	500	500	500
Weights	Service Weight	5	unloaded	kg	4160	4245	4490	4575
	Axle Load	6	loaded / unloaded, front	kg	6498/1836	6522/1860	7246/1787	7270/1812
	Axle Load	7	loaded / unloaded, rear	kg	742/2404	802/2464	818/2777	878/2837
Tires	Tire Type	8			Pneumatic	Pneumatic	Pneumatic	Pneumatic
	Wheels	9	front / rear		2/2	2/2	2/2	2/2
	Wheelbase	10		mm	1760	1760	1760	1760
	Tire Size	11	front		28×9-15-14PR	28×9-15-14PR	28×9-15-14PR	28×9-15-14PR
	Tire Size	12	rear		6.5-10-10PR	6.5-10-10PR	6.5-10-10PR	6.5-10-10PR
	Tread Width	13	front / rear	mm	1005/980	1005/980	1005/980	1005/980
Mast	Max. Fork Height	14		mm	3000	3000	3000	3000
	Free lift	15		mm	145	145	145	145
	Height, Upright Lowered	16		mm	2120	2120	2120	2120
	Height, Upright Extended	17		mm	3605	3605	3605	3605
	Mast Tilt, Fwd/Back	18		deg	6/12	6/12	6/12	6/12
	Carriage	19	width	mm	1100	1100	1100	1100
	Fork Spread	20	minimum / maximum	mm	272/1072	272/1072	272/1072	272/1072
	Fork Dimensions	21	T x W x L	mm	45×122×1070	45×122×1070	50×122×1070	50×122×1070
Chassis	Length to Fork Face	22		mm	2720	2720	2778	2778
	Overall Width	23		mm	1225	1225	1225	1225
	Overhead Guard Height	24		mm	2150	2150	2150	2150
	Turning Radius	25	minimum outside	mm	2450	2450	2508	2508
Performance	Travel Speed	26	loaded / unloaded	km/h	12/13	12/13	12/13	12/13
	Lift Speed	27	loaded / unloaded	mm/s	290/400	290/400	290/400	290/400
	Lower Speed	28	loaded / unloaded	mm/s	440/430	440/430	440/430	440/430
	Max. Drawbar Pull	29	5-minute working system	kg	13180	13180	13180	13180
	Max. Gradeability	30	5-minute working system	%	15	15	15	15
Systems	Controllers	31	brand		Jiachen	Jiachen	Jiachen	Jiachen
		32	drive output	kW	10	10	10	10
		33	hydraulic output	kW	15	15	15	15
	Battery	34	type		lithium battery	lithium battery	lithium battery	lithium battery
		35	voltage	V	80	80	80	80
		36	standard capacity (5 hour rating)	Ah	205	280/350	205	280/350
		37	weight, minimum / maximum	kg	190	275	190	275

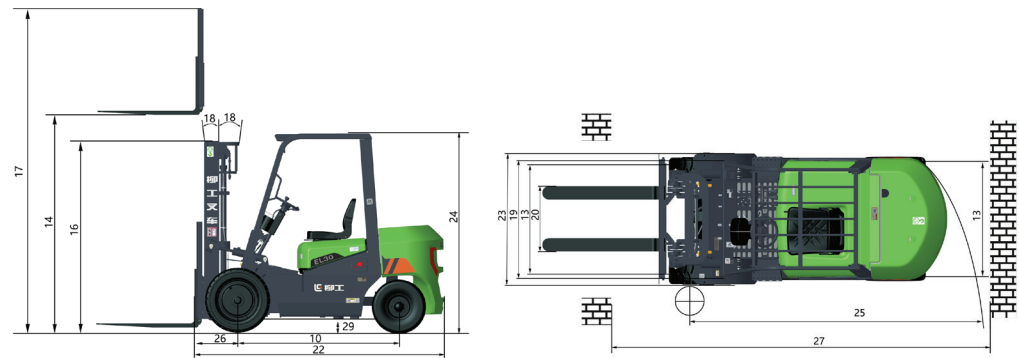

TOUGH WORLD. TOUGH EQUIPMENT.

Liuzhou LiuGong Forklift Co., Ltd.
No. 1 Yanghe Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 388 6124
E: overseas@liugong.com
MH: www.lgforklift.cn

Like and follow us:



LG-PG-122022-ENG

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.



CPD30/35-EJL
E SERIES LITHIUM BALANCED FORKLIFT

TOUGH WORLD. TOUGH EQUIPMENT.